



## How To: Case Removal and Installation

Sette 30, 270, 270W, 270Wi

**Time:** 2 minutes

**Difficulty:** Easy

**Tools/Supplies:** T-10 Torx Bit,

**Parts:** n/a

**\*\*\* Unplug the grinder from power supply \*\*\***

1. Tilt the machine forward on a hand towel, resting the machine on its face



continued below



2. Remove the rear rubber foot (use pliers if needed)



3. Remove the four T10 Torx screws from the rear of the machine, and the one Torx screw that lies inside the rear foot slot. Screw positions indicated below.





4. Stand the machine back upright and gently pull the silver hopper towards the back of the grinder. There will be wires connected to the casing so be gentle.



5. Pull up on the case where the power cord plugs in. At this point the entire back case will separate from the rest of the machine, but two wires will still connect the two.






6. Once removed, it is recommended to leave the wire connections intact. Rest the back case on the unit as pictured below.



7. Although the capacitor will be discharged unless there are extenuating circumstances, exercise caution as it potentially has a high voltage charge that can shock you if the contacts are touched.

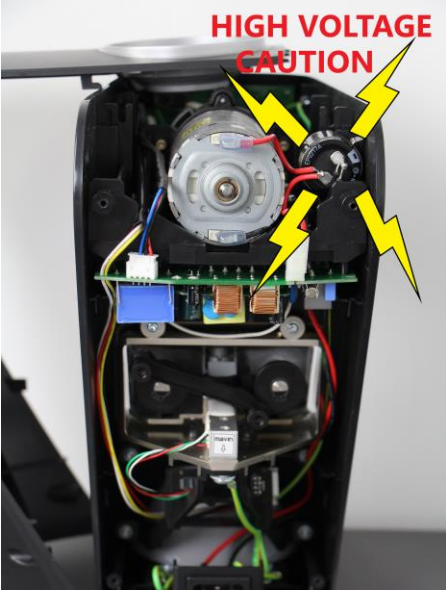



**Back case installation:**

- 1. Get the case roughly in position.



- 2. Adjust the top of the case so it is level with the sides of the main body.





3. Adjust the bottom of the case so both the left and right sides are inside the main body, as well as the lowest portion of the case.



4. Alternate applying pressure to the top and bottom of case until it is flush and fully installed.



5. Reinstall the screws and feet.